


QUEUING RAILS - JIA026-033 (OR TAMBO INT)

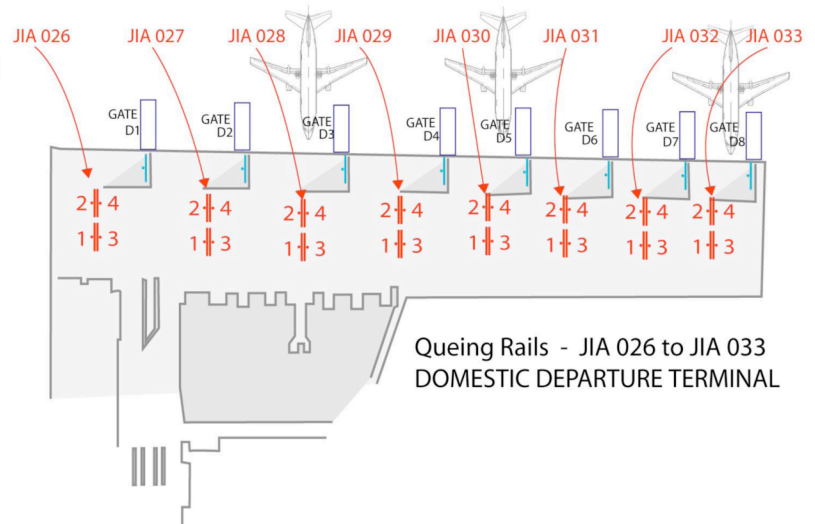

SUBSTRATE: REMOVABLE S A VINYL - PRINTED HIGH RES (700 DPI)

Gates	Site Numbers		Height (mm)	Width (mm)
D1	JIA026/1	JIA026/3	850	735
	JIA026/2	JIA026/4	850	1,554
D2	JIA027/1	JIA027/3	850	1,095
	JIA027/2	JIA027/4	850	1,095
D3	JIA028/1	JIA028/3	860	1,390
	JIA028/2	JIA028/4	860	1,400
D4	JIA029/1	JIA029/3	870	1,500
	JIA029/2	JIA029/4	870	1,500
D5	JIA030/1	JIA030/3	840	1,380
	JIA030/2	JIA030/4	840	1,405
D6	JIA031/1	JIA031/3	840	1,385
	JIA031/2	JIA031/4	840	1,395
D7	JIA032/1	JIA032/3	850	1,390
	JIA032/2	JIA032/4	850	1,390
D8	JIA033/1	JIA033/3	850	1,395
	JIA033/2	JIA033/4	850	1,395

Repro Specifications:

Scans must be full colour CMYK, approx A3 at 300dpi not less than 180mb.

File Formats : Adobe Photoshop - ver3, 4, 5.5, CS3, Freehand - 8, 9, 10, 11, MX, Adobe Illustrator - 8, Corel Draw - 13, Indesign - CS3.

Convert all type to paths. Cromalin/Iris proof for colour matching purposes. May use Pantone references for spot colours, CMYK % values are not acceptable, due to differences in pigment hues from printer to printer. Bleed background to material size.

NOTES: If a document contains any scanned or raster images, supply these as separate Photoshop "tif" or "eps" files. No links should be embedded on document. Ensure document is "CMYK" not "RGB". All test must be converted to curves. Bleed must be added all round in final made up document. If no bleed is added, the file must be supplied in a layered format. All artwork must be set up to a minimum of 10% of the final size. DPI of scans should be a minimum of 300dpi and 10% of final size